


Florina[®]
CERAMICS
- SINCE 2008 -

ROVERE

Excellence
In Details

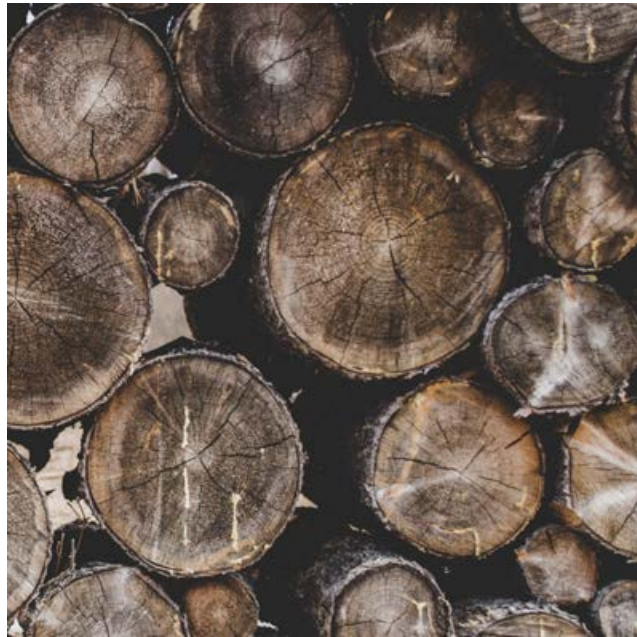

Excellence
In Details

New
Product
—



Rovere

Rovere



Bianco







Floor
R1 | 200x1200mm/8"x48"

Wall
R1 | 200x1200mm/8"x48"

Floor
R1 | 200x1200mm/8"x48"



Rovere



Almond





Floor
R2 | 200x1200mm/8"x48"

Table
R2 | 200x1200mm/8"x48"




Floor
R2 | 200x1200mm/8"x48"




Rovere



Noce

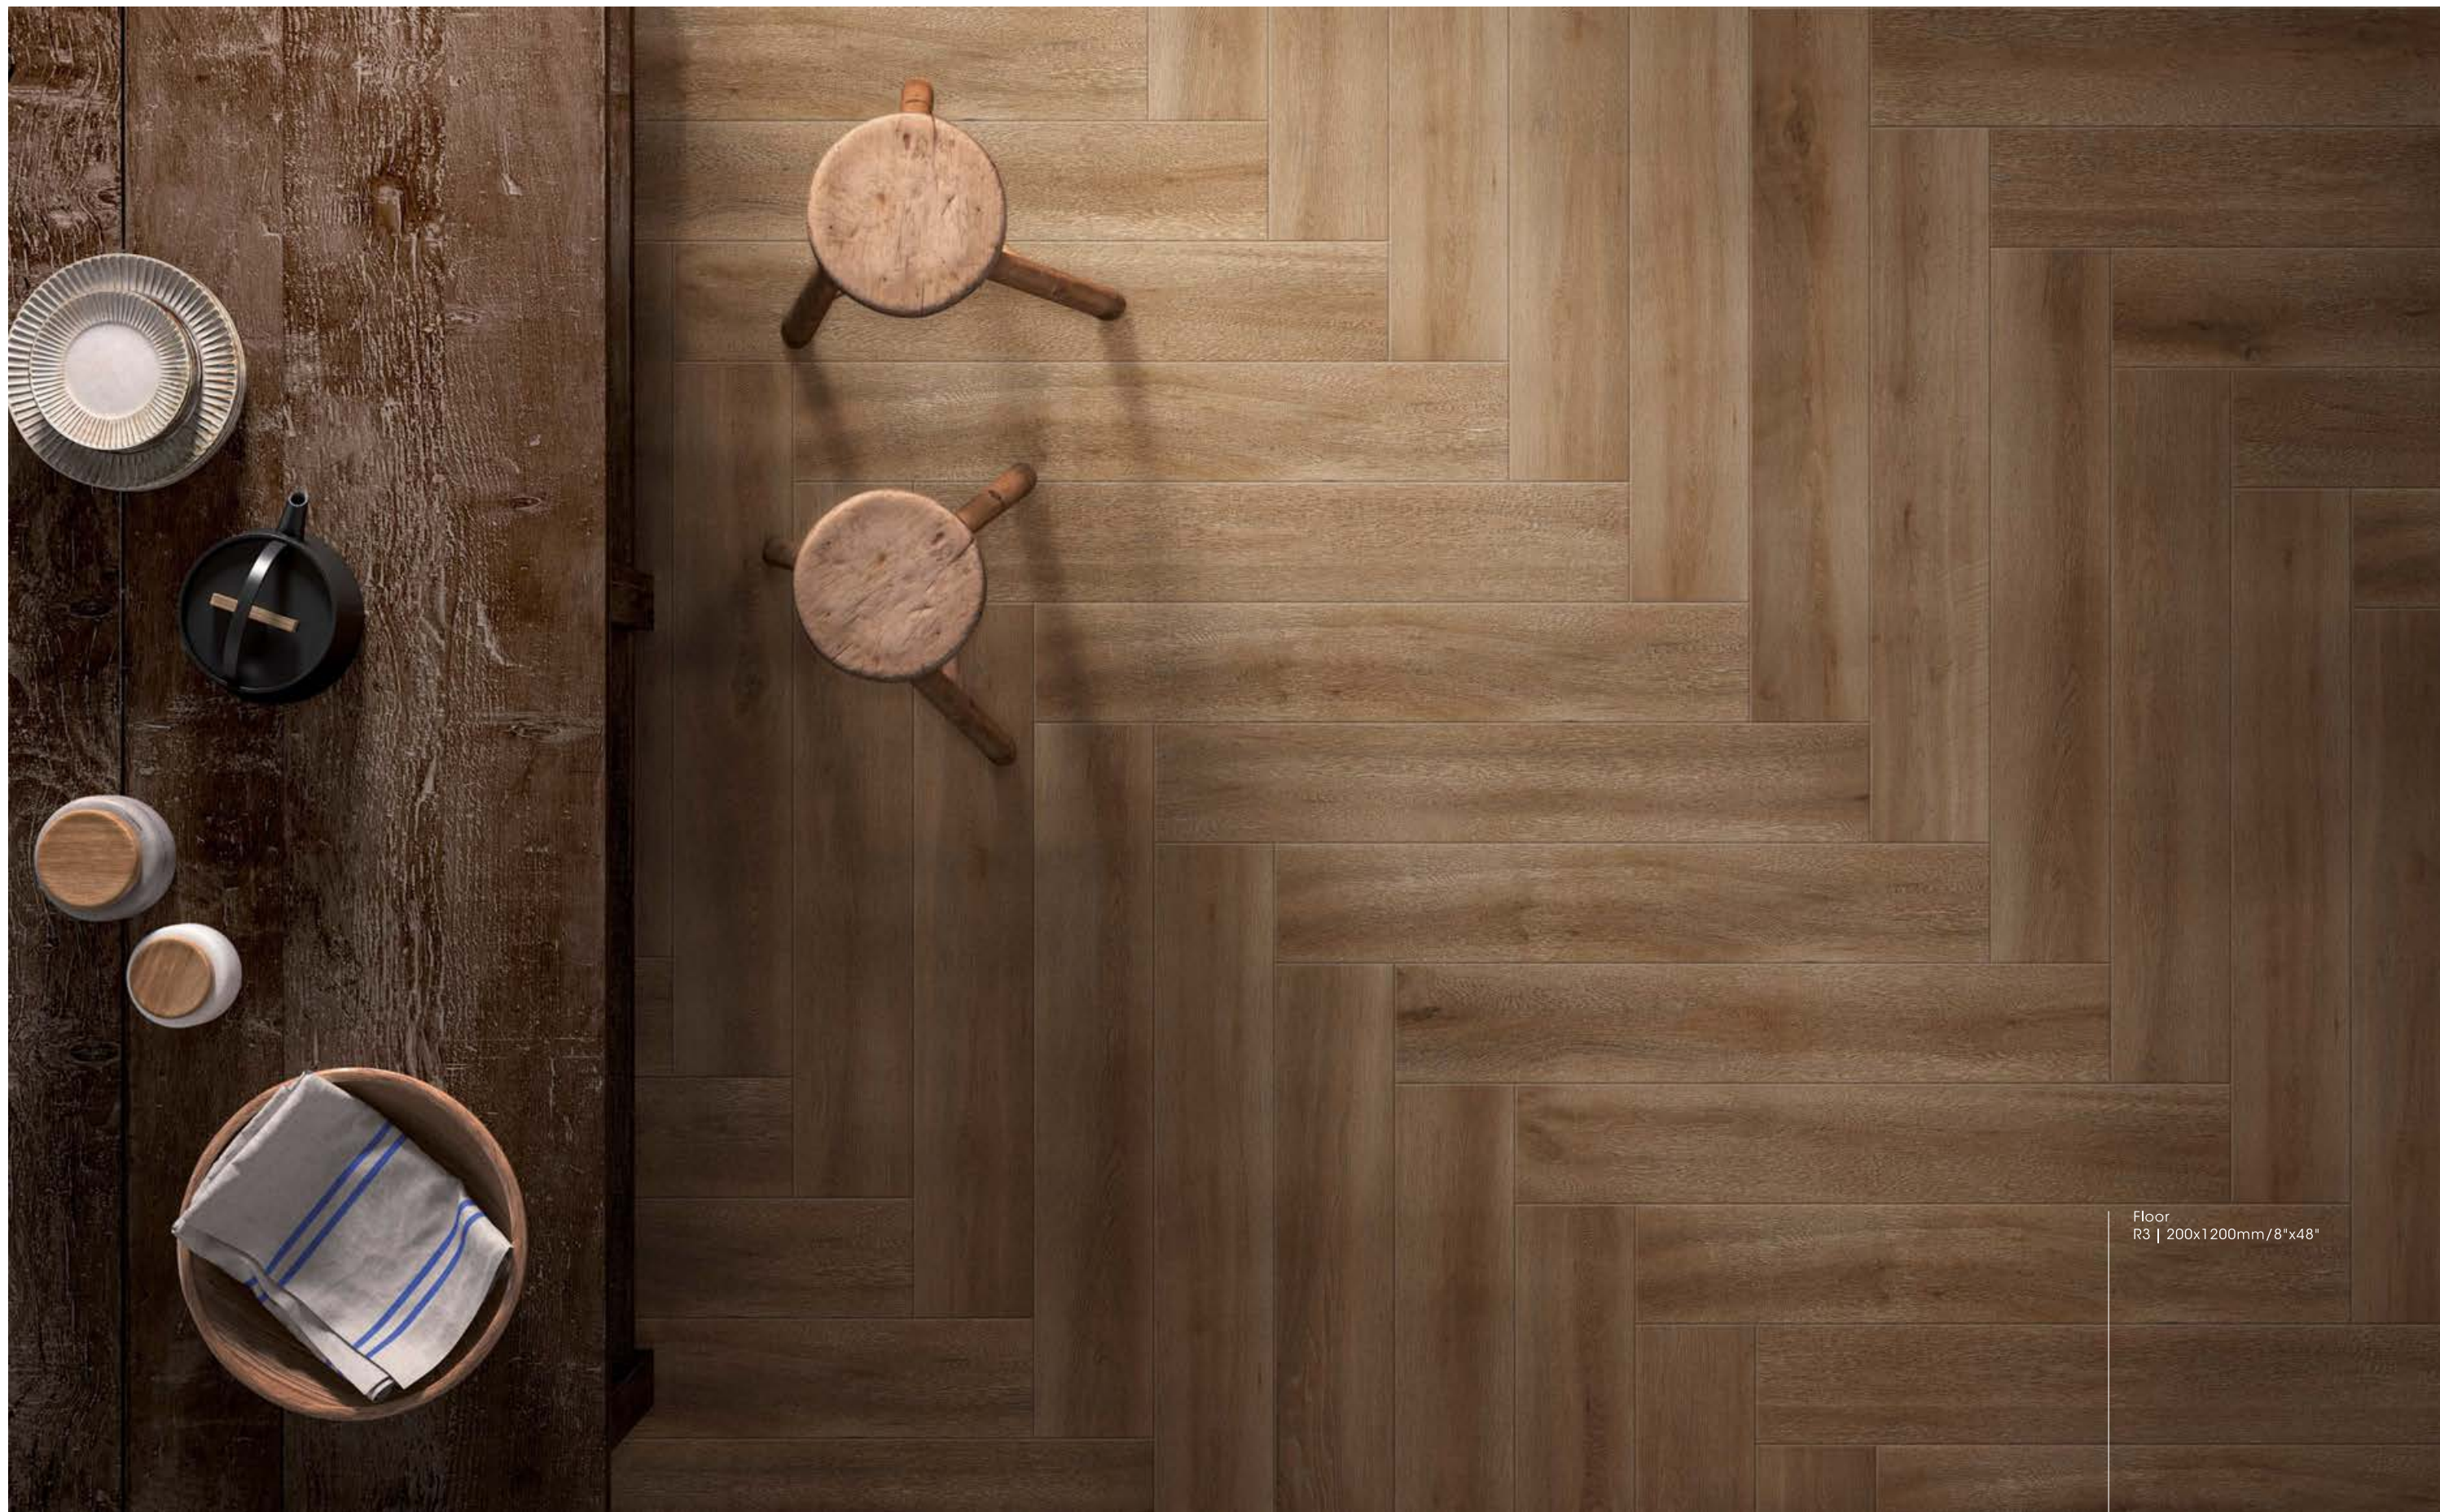

Floor
R3 | 200x1200mm/8"x48"

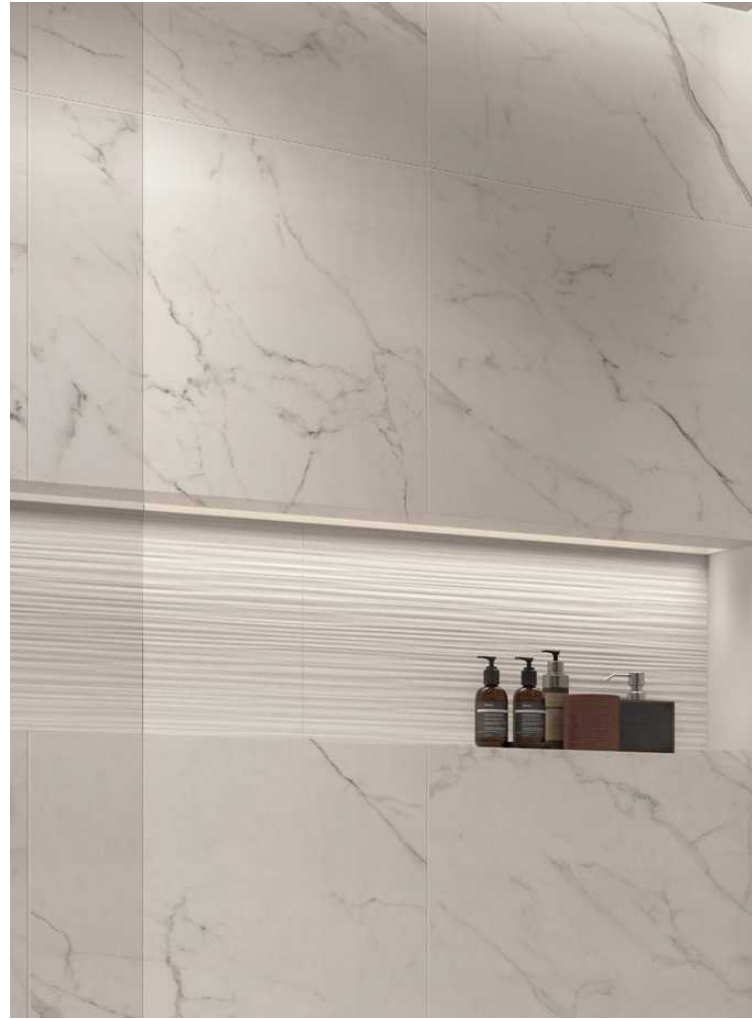

Wall
R3 | 200x1200mm/8"x48"
MM1 | 600x600mm/24"x24"

Floor
R3 | 200x1200mm/8"x48"





Rovere



Tobacco





Wall
P4 | 600x1200mm/24"x48"

Floor
R4 | 200x1200mm/8"x48"



Wall
P4 | 600x1200mm/24"x48"



Rovere



Grey








Floor
R5 | 200x1200mm/8"x48"



Bianco

R1

18 Faces

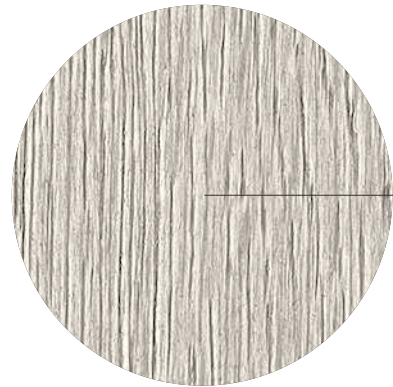

200x1200mm / 8"x48"

Finishes




Matt

Almond

R2

18 Faces

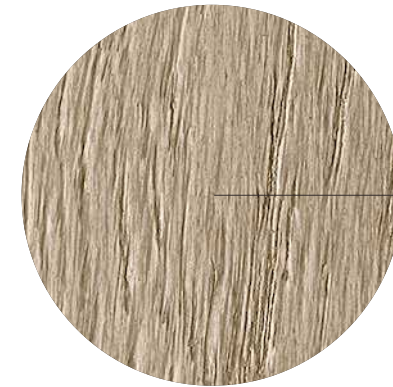

200x1200mm / 8"x48"

Finishes



Matt

Noce
R3

18 Faces



200x1200mm / 8"x48"



Finishes



Matt

Tobacco
R4

18 Faces

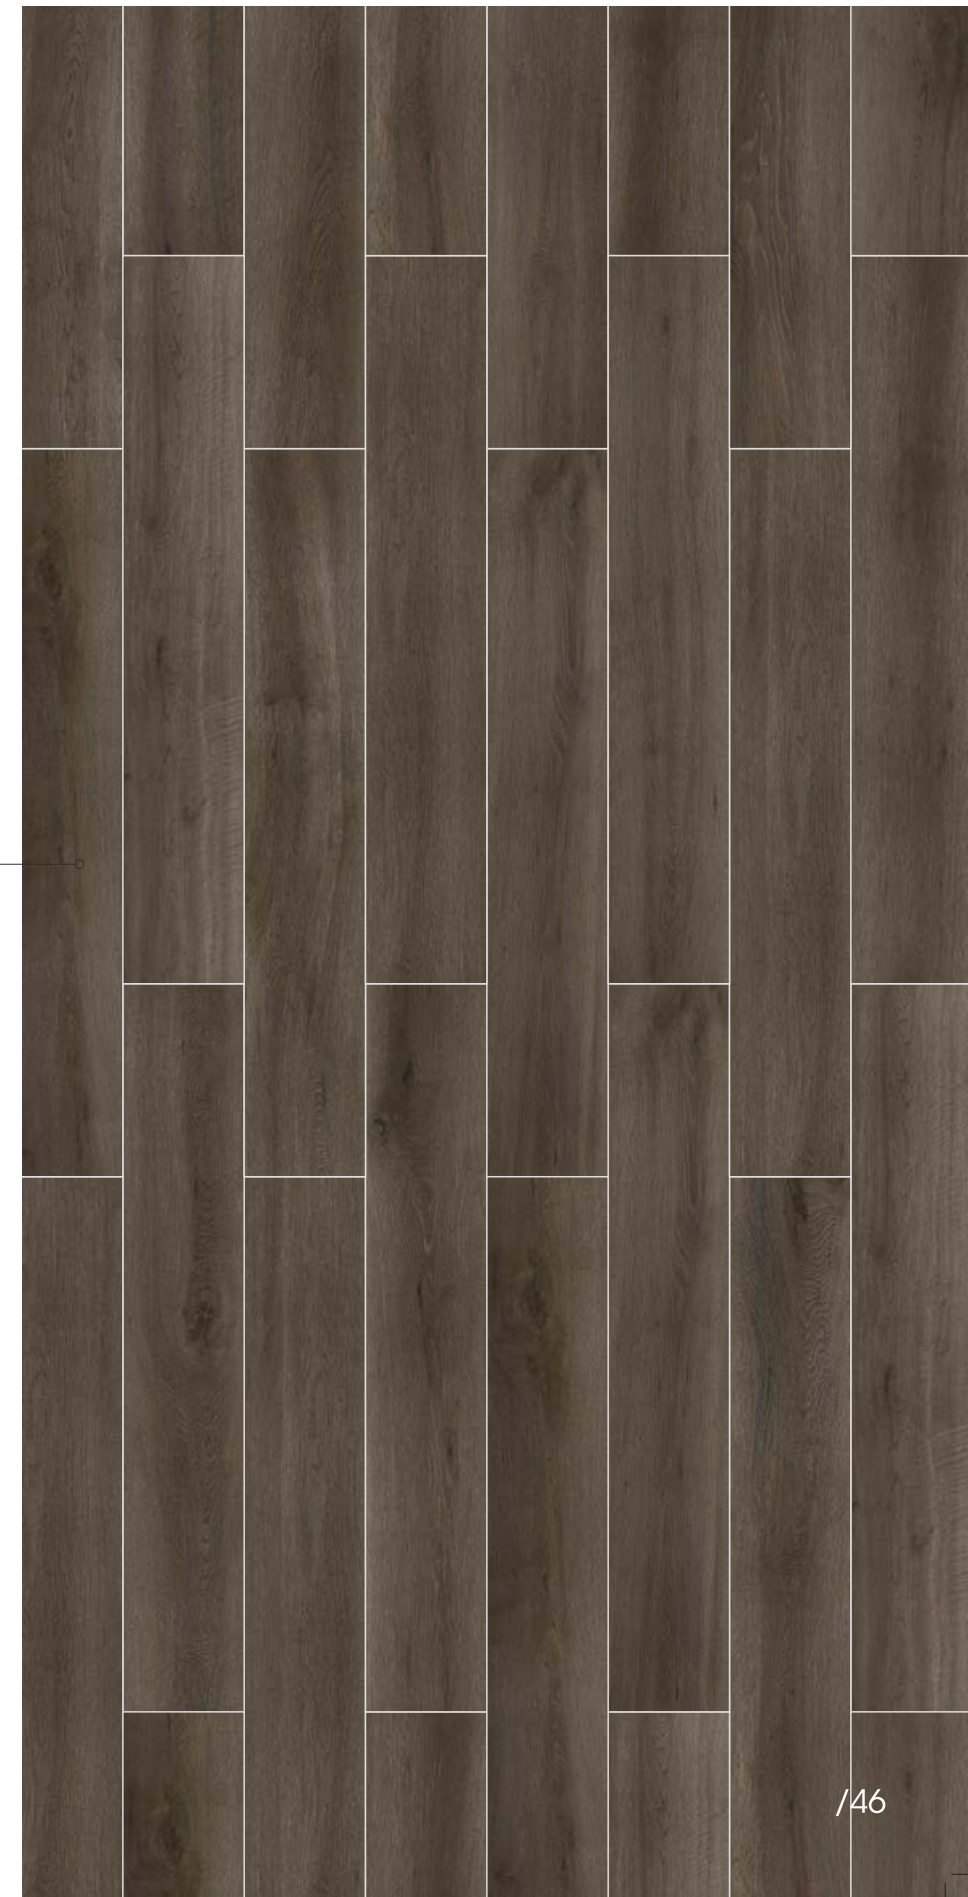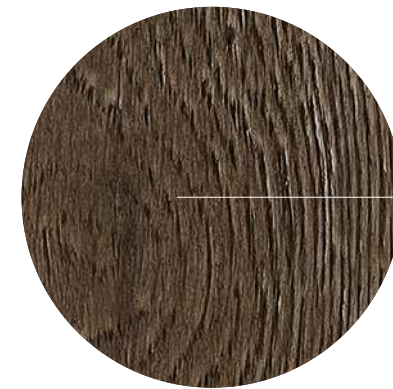

200x1200mm / 8"x48"

Finishes



Matt

Grey
R5

18 Faces



200x1200mm / 8"x48"

Finishes




Matt




Laying Proposals

▼
3mm
▲


Before laying, it is recommended to check the color number, size and so on, in order to achieve better results; it is suggested that the special joint mixture of Florina tile be used for all products of Florina tile; There shall be a seam for paving, and it is suggested that Florina's products have a 3mm.

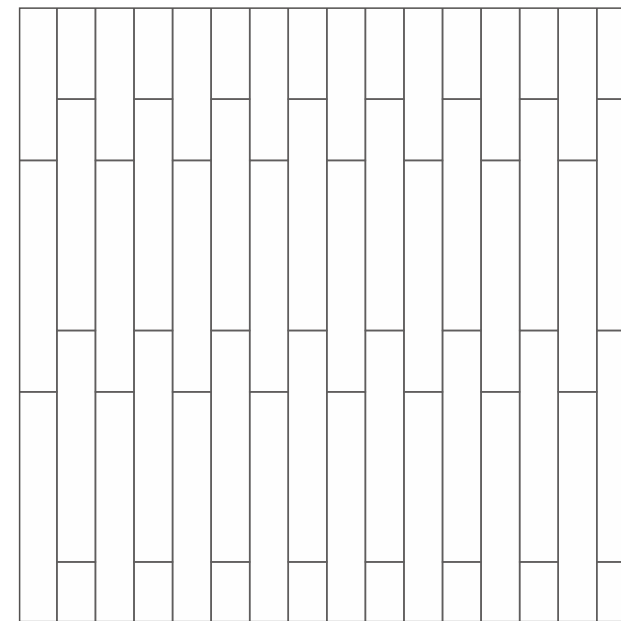


a.

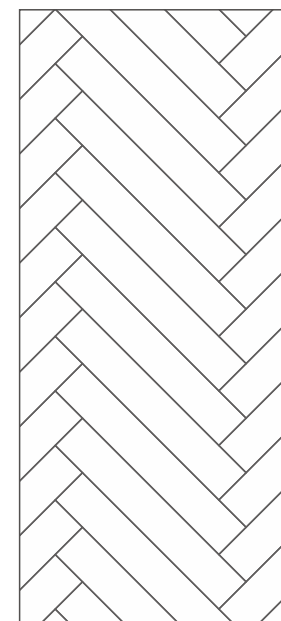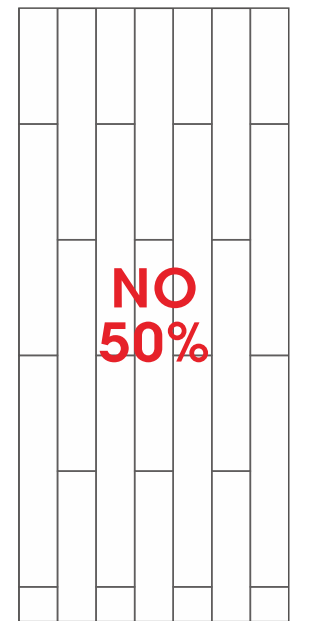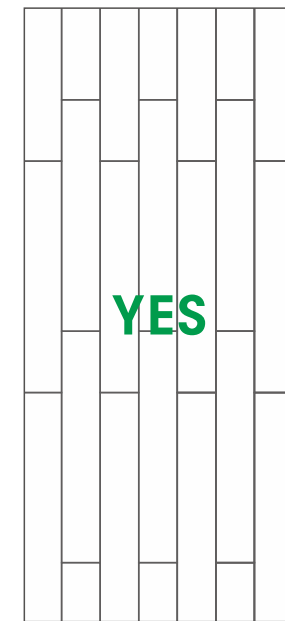


b.

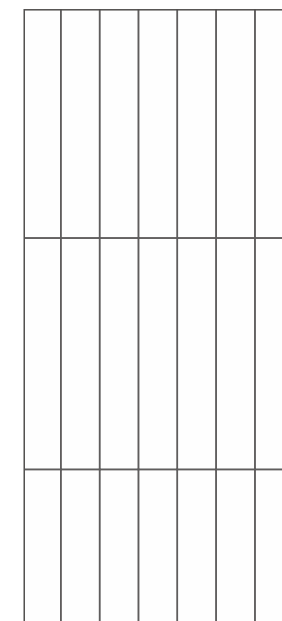

c.

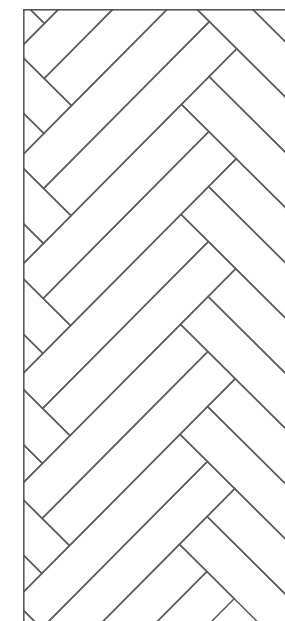



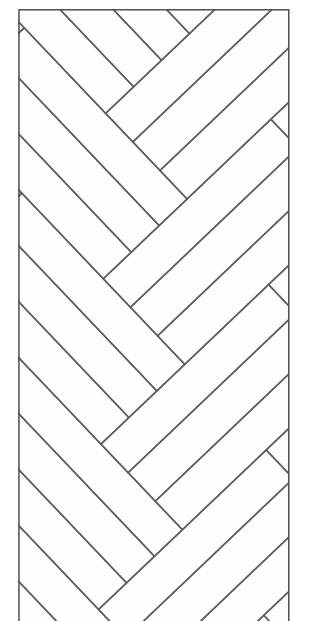











d.



e.

Technical Performance

		TEST METHOD	INTERNATIONAL STANDARDS	FLORINA VALUE
	LENGTH	ISO 10545-2	±0.6%, ±2.0mm	±0.1%, ±1.0mm
	WIDTH	ISO 10545-2	±0.6%, ±2.0mm	±0.1%, ±1.0mm
	THICKNESS	ISO 10545-2	±5%, ±0.5mm	±1%, ±0.3mm
	SURFACE FLATNESS	ISO 10545-2	±0.5%, ±2.0mm	±0.5%, ±2.0mm
	STRAIGHTNESS OF SIDES	ISO 10545-2	±0.5%, ±1.5mm	±0.02%, ±0.1mm
	RECTANGULARITY	ISO 10545-2	±0.5%, ±2.0mm	±0.1%, ±1.0mm
	WATER ABSORPTION	ISO 10545-3	Eb≤0.5%	Eb≤0.5%
			Individual maximum 0.6%	Individual maximum 0.6%
	BREAKING STRENGTH	ISO 10545-4	≥1300N	≥1300N
	MODULUS OF RUPTURE	ISO 10545-4	Minimum 35	Minimum 35
			Individual minimum 32	Individual minimum 32
	STAIN RESISTANCE	ISO 10545-14	Minimum Class 3	Class 5 Livello 5 Clase5
	ABRASION RESISTANCE	ISO 10545-7	Report abrasion class	Class 4
			Report cycles passed	1500
	FROST RESISTANCE	ISO 10545-12	Required	Pass
	CRAZING RESISTANCE	ISO 10545-11	Required	Pass
	SLIP RESISTANCE	DIN 51130	From R9 to R11 Da R9 a R11	Matt R9 - R10
		DIN 51097	Class A, B and C	Matt Class B
		ANSI A137.1-2012	Matt μ≥0.42	Matt μ≥0.55
		AS 4586:2013 Appendix A	P0 - P5	Matt P3
		GB/T 4100-2015 Appendix M	μ≥0.5	Static friction coefficient of floor tile ≥0.5

Packing Information

Florina CERAMICS						
FORMAT(mm/in)	PCS/BOX	SQM/BOX	KG/BOX	BOX/PALLET	SQM/PALLET	KG/PALLET
200x1200mm 8"x48"	6	1.44	42	30	43.2	1260

@FlorinaCeramics



 www.florina.cn | info@florina.cn | 400-999-9394